

Customer-Specific Isolation Amplifier DK 8000

Isolation And Conversion Of Industrial Signals
In Special Applications

With the Isolation Amplifier DK 8000 DRAGO is extending its offer on high-functional and high-reliable components of customer-specific solutions.


The Isolation Amplifier DK 8000 is used for isolation and conversion of customer-specific industrial signals. When it comes to individualized solutions, the know-how advantage of our development team stands ready to serve. This allows us to offer customer-specific solutions with the proverbial DRAGO quality in the shortest possible time; solutions which, as a result of individualized consultation, optimally meet all customer needs, including their economic ones.

The slim housing with 12.5 mm width saves space in the switch cabinet and facilitates by the practical plug-in screw terminal blocks the assembly.


The new universal power pack for 20 ... 253 V AC/DC means the DK 8000 can be used anywhere in the world, with all mains power supplies. The unit's high efficiency contributes significantly to reducing the unit's own heat generation. This is reflected in extremely high reliability and long-term stability.

- **Customer-Specific Solutions**
Special Input and output range on request
- **Universal Power Supply for 20 ... 253 V AC/DC**
Applicable world-wide for all common supply voltages
- **3-Port Isolation**
Protection against erroneous measurements due to parasitic voltages or ground loops
- **Ultra-small-sized housing**
12.5 mm housing with plug-in screw terminal blocks
- **High accuracy**
No falsification of measured signal
- **Protective Separation**
Protects service personnel and downstream devices against impermissibly high voltage
- **Maximum reliability**
No maintenance costs
- **5 Years Warranty**

5 Years Warranty
Defects occurring within 5 years from delivery are remedied free of charge at our plant (carriage and insurance paid by sender).

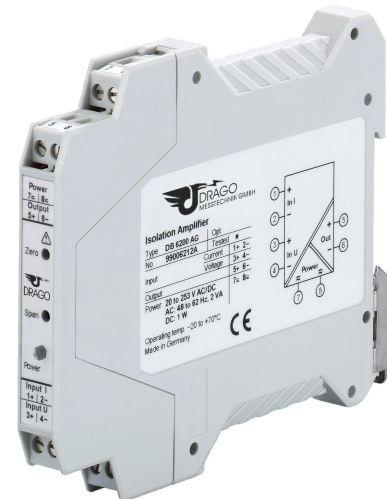

Block diagram

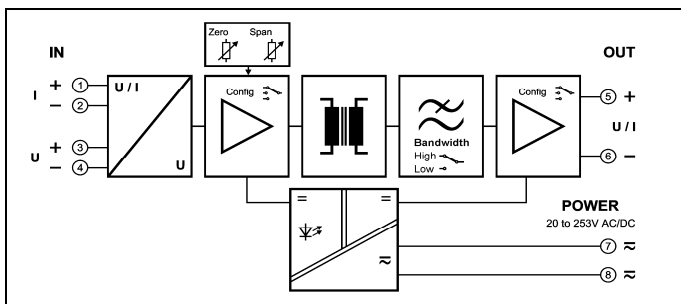


Technical Data

Input	
Input signal	customer-specific technical data as orders (see label)
Input resistance	Current input approx. 25 Ω (depends on measuring range) Voltage input approx. 1 MΩ (depends on measuring range)
Overload	Max. 120 % of final value
Output	
Output signal	customer-specific technical data as orders (see label)
Load	Current output ≤ 12 V (600 Ω @ 20 mA) Voltage output ≤ 20 mA (500 Ω @ 10 V)
Transmission range	unipolar: - 2 ... + 110 % bipolar: - 110 ... + 110 %
Ripple	< 10 mV _{rms}
General Data	
Transmission error	typical 0.1 % of final value (max. 0.3 %, depends on measuring range)
Temperature coefficient ¹⁾	100 ppm/K of final value
Zero/Span Adjustment	optional
Cut-off frequency (-3 dB)	Max. 10 kHz
Test voltage	4 kV, 50 Hz input against output against power supply
Working voltage ²⁾ (Basic Insulation)	Up to 1000 V AC/DC for overvoltage category II and pollution degree 2 acc. to EN 61010-1 between all circuits.
Ambient temperature	Operation -20 to +70 °C (-4 to +158 °F) Transport and storage -35 to +85 °C (-31 to +185 °F)
Power supply	20 ... 253 V AC/DC AC 48 ... 62 Hz, approx. 2 VA DC approx. 1,0 W
EMC ³⁾	EN61326 -1
Construction	12.5 mm housing, protection class: IP 20
Weight	Approx. 100 g

- 1) Average TC in specified operating temperature range
- 2) As far as relevant the standards and rules mentioned above are considered by development and production of our devices. In addition relevant assembly rules are to be considered by installation of our devices in other equipments. For applications with high working voltages, take measures to prevent accidental contact and make sure that there is sufficient distance or insulation between adjacent situated devices.
- 3) Minor deviations possible during interference

Dimensions

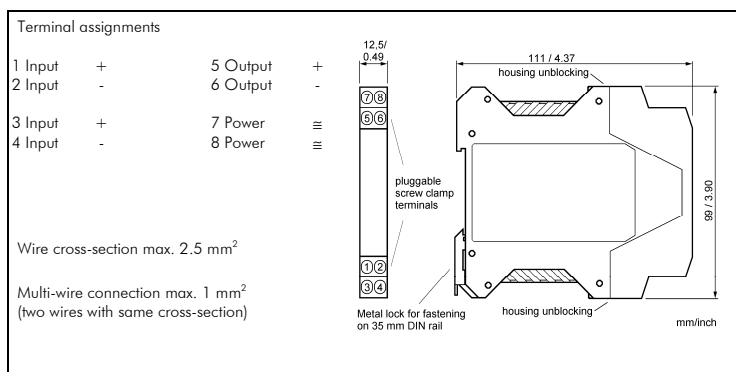

Product line

Devices	Order No.
Customer-Specific Isolation Amplifier	DK 8000 - XXX

The index number -XXX describes the signal combination and will be announced by order.

Subject to change!