


Temperature Transmitter DR 48 / DR49



Read these instructions before using the product and retain for future information.

DR 48 / DR 49

1. Before Startup



When operating the temperature transmitter, certain parts of the module can carry dangerous voltage! Ignoring the warnings can lead to serious injury and/or cause damage!

The temperature transmitter should only be installed and put into operation by qualified staff. The staff must have studied the warnings in these operating instructions thoroughly.

In applications with high working voltages sufficient distance and isolation as well as shock protection must be ensured.

Safe and trouble-free operation of this device can only be guaranteed if transport, storage and installation are carried out correctly and operation an maintenance are carried out with care.



Appropriate safety measures against electrostatic discharge (ESD) should be taken during range selection and assembly on the transmitter.

2. Short Description

The Temperature Transmitter DR 48 / DR49 converts the Pt-sensor signal to 0/4...20 mA and 0...5/10 V standard signals. The signal combination is selected by the Order No.

The 3-way isolation guarantees reliable decoupling of the sensor circuit from the processing circuit and power supply and prevents linked measurement circuits from influencing each other. The Protective Separation with high isolation level provides protection for personnel and downstream devices against impermissibly high voltage.

3. Functioning

The sensor signal is amplified, linearized, modulated and then electrically decoupled using a transformer. The isolated signal is then made available at the output, demodulated, filtered and amplified.


4. Mounting, Electrical Connection

The temperature transmitter is mounted on standard 35 mm DIN rail.

Terminal assignments

| | |
|------------------|------------------|
| 1 Input + Pt | 5 Output + |
| 2 Input - Pt | 6 Output - |
| 3 Input + 3-wire | 7 Power supply ≡ |
| 4 - | 8 Power supply ≡ |

5. Block Diagram

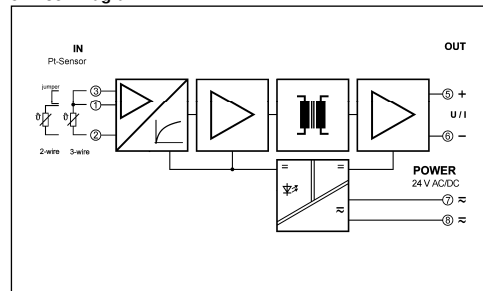

6. Technical Data


| | |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input | |
| Input signal | Pt100 Pt1000 |
| Sensor connection | 3-wire 2-wire with additional connection terminal 1 to 3 |
| Measuring range (see Order Information) | Fixed ranges within -50 to +400 °C |
| Sensor wire resistance | < 10 Ω / wire at 3 wire connection |
| Sensor current | 1 mA 0,1 mA |
| Output | |
| Output signal (see Order Information) | 0 ... 20 mA 0 ... 5 V 4 ... 20 mA 0 ... 10 V |
| Load | Current output ≤ 500 Ω Voltage output ≥ 2 kΩ |
| Ripple | < 10 mV _{rms} |
| Offset | ≤ 20 μA / 10 mV |
| General data | |
| Transmission error | < 0.2 % of input span |
| Temperature coefficient ¹⁾ | < 0.025 % / K |
| Calibration | ± 0.2 °C |
| Response time | < 100 ms |
| Test voltage | 2.5 kV, 50 Hz input against output against power supply |
| Working voltage ²⁾ (Basic insulation) | Up to 600 V AC/DC for overvoltage category II and pollution degree 2 acc. to EN 61010-1 between all circuits. |
| Protection against electrical shock ³⁾ | Protective separation according to EN 61140 by reinforced insulation in accordance with EN 61010-1 up to 300 V AC/DC for overvoltage category II and pollution degree 2 between all circuits. |
| Ambient temperature | Operation 0 to + 55 °C (+32 to +131 °F) Transport and storage -25 to + 80 °C (-13 to +176 °F) |
| Power supply | 24 V AC/DC AC 48 ... 62 Hz, approx. 2 VA ± 15 % DC approx. 0,7 W |
| EMC ³⁾ | EN 61326 -1 |
| Construction | 11,2 mm (0.44") housing, protection type: IP 20 |
| Connection | ≤ 2.5 mm ² , AWG 14 |
| Weight | Approx. 50 g |

- Average TC in specified operating temperature range
- As far as relevant the standards and rules mentioned above are considered by development and production of our devices. In addition relevant assembly rules are to be considered by installation of our devices in other equipments. For applications with high working voltages, take measures to prevent accidental contact and make sure that there is sufficient distance or insulation between adjacent situated devices.
- Minor deviations possible during interference

7. Order Information

| Devices | Order No. | |
|-----------------------------|----------------------------------------------------------------------------|---------------|
| Temperature-Transmitter | Pt100 | DR 48 K - X X |
| | Pt1000 | DR 49 K - X X |
| ↓ | | |
| Input | 0 ... + 50 °C | 0 |
| | 0 ... +100 °C | 1 |
| | 0 ... +200 °C | 2 |
| | 0 ... +300 °C | 3 |
| | 0 ... +400 °C | 4 |
| | - 50 ... +150 °C | 5 |
| | - 50 ... +100 °C | 6 |
| - 50 ... +50 °C | 7 | |
| ↓ | | |
| Output | 0 ... 20 mA | 2 |
| | 4 ... 20 mA | 4 |
| | 0 ... 5 V | 5 |
| | 0 ... 10 V | 6 |
| cross-connector (2 pcs.) | for looping through the power supply for up to 10 Tiny Snap, splittable | DZU 0801 |

8. Dimensions

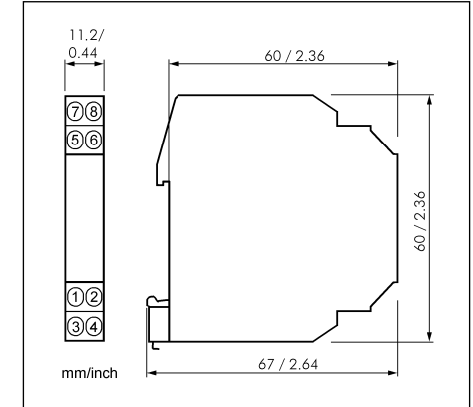

LIMITED WARRANTY

DRAGO Messtechnik GmbH hereby warrants that the Product will be free from defects in materials or workmanship for a period of **five (5) years** from the date of delivery ("Limited Warranty"). This Limited Warranty is limited to repair or replacement at DRAGO's option and is effective only for the first end-user of the Product. This Limited Warranty applies only if the Product:

- is installed according to the instructions furnished by DRAGO;
- is connected to a proper power supply;
- is not misused or abused; and
- there is no evidence of tampering, mishandling, neglect, accidental damage, modification or repair without the approval of DRAGO or damage done to the Product by anyone other than DRAGO.

Delivery conditions are based upon the „GENERAL CONDITIONS FOR THE SUPPLY OF PRODUCTS AND SERVICES OF THE ELECTRICAL AND ELECTRONICS INDUSTRY“ recommended by the Zentralverband Elektrotechnik- und Elektronikindustrie (ZVEI) e.V. .

Subject to change!

DRAGO Messtechnik GmbH
Waldstrasse 86 - 90
13403 BERLIN
GERMANY

Phone: +49 (0)30 40 99 82 - 0
Fax: +49 (0)30 40 99 82 - 10

E-Mail: info@drago-messtechnik.de
Internet: www.drago-messtechnik.de